




BLACHOWKRĘTY Z ŁBEM PŁASKO-SOCZEWK. PH

Cross recessed pan head tapping screws - H

EZ7981

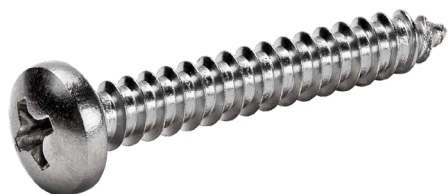

DIN	7981 C-H
ISO	7049
PN/M	83116
PN-EN ISO	7049

l	2,2	2,9	3,5	3,9	4,2	4,8	5,5	6,3
[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
4,5	●▲							
6,5	●▲	●▲	●▲	●▲	●			
9,5	●▲	●▲	●▲	●▲	●▲	●▲		
13	●▲	●▲	●▲	●▲	●▲	●▲	●▲	●▲
16	●▲	●▲	●▲	●▲	●▲	●▲	●▲	●▲
19	●▲	●▲	●▲	●▲	●▲	●▲	●▲	●▲
22	●▲	●▲	●▲	●▲	●▲	●▲	●▲	●▲
25	●▲	●▲	●▲	●▲	●▲	●▲	●▲	●▲
28				●▲				
32		●▲	●▲	●▲	●▲	●▲	●▲	●▲
35						●▲		
38			●▲	●▲	●▲	●▲	●▲	●▲
42							●▲	
45			●▲	●▲	●▲	●▲	●▲	●▲
50			●▲	●▲	●▲	●▲	●▲	●▲
55						●▲	●▲	
60			●▲	●▲	●▲	●▲	●▲	●▲
70			●▲	●▲	●▲	●▲	●▲	●▲
80					●▲	●▲	●▲	●▲
90						●▲	●▲	●▲
100					●	●▲	●▲	●▲
110						●▲		
120						●▲	●▲	●▲
 [szt./pc.]	1000	1000	1000 l >= 45 500	1000 l >= 38 500	1000 l >= 32 500 l >= 50 200	1000 l >= 25 500 l >= 45 200	1000 l >= 25 500 l >= 45 200	500 l >= 25 200
dk	4,3	5,5	6,8	7,5	8,1	9,5	10,8	12,4
k	1,8	2,2	2,6	2,8	3,05	3,55	3,95	4,55
m	2,6	3	4,2	4,4	4,6	5	6,5	7,1
Prowadzenie	PH1	PH1	PH2	PH2	PH2	PH2	PH3	PH3

● - asortyment A2 w ofercie / product A2 in offer | ▲ - asortyment A4 w ofercie / product A4 in offer